

PROJECT :	
MODEL # :	
ITEM # :	QTY :
AVAILABLE W/H :	
APPROVAL :	

Bottom Mount Reach-In Refrigerator / Freezer

L-SERIES



BASR1 / BASF1

BASR2 / BASF2

BASR3 / BASF3

STANDARD FEATURES

- BOTTOM MOUNT COMPRESSOR**
THE BOTTOM MOUNT COMPRESSOR PROVIDES QUICK AND EASY MAINTENANCE
- STAINLESS STEEL INTERIOR AND EXTERIOR**
QUALITY STAINLESS STEEL HELPS MINIMIZE DENTS, SCRATCHES AND RUST
- STANDARD REAR WALL AIR GUARD ENSURES PROPER AIR FLOW AND COOLING**
- EVAPORATOR FAN STOPS AUTOMATICALLY WHEN DOOR IS OPENED**
- RECESSED DOOR HANDLES**
OUR RECESSED DOOR HANDLES HELP PREVENT SHIPPING DAMAGE AND BREAKAGE
- STANDARD DOOR LOCKS**
- DURABLE DOOR GASKET WITH EASY REPLACEMENT**
- INTERIOR INCANDESCENT LIGHT**
- CFC FREE HIGH DENSITY CELL POLYURETHANE INSULATION**
- DIGITAL TOTAL MONITORING SYSTEM**
OFFERS AN AUTOMATIC DOOR ALARM SYSTEM, EASY TEMPERATURE ADJUSTMENT AND A SIMPLE TO CONTROL DEFROST CYCLE
- 4" DIAMETER SWIVEL CASTERS WITH FRONT BRAKES**
- ALL MODELS ACCOMMODATE FULL SIZE BUN SHEET PANS**
- 4 SHELVES PER EACH DOOR SECTION WITH 1" ADJUSTABLE SHELVING HEIGHT**
- SELF-CLOSING AND STAY OPEN DOORS**
DOORS REMAIN OPEN AT 120° AND AUTOMATICALLY CLOSE AT 96°
- DOOR OPEN WARNING ALARM**
- FIELD REVERSIBLE DOOR (ADDITIONAL KIT REQUIRED)**
BASF1 AND BASR1 MODELS ONLY



WARRANTY
3 Years Parts and Labor
5 Years on Compressor in USA


APPROVALS:

AVAILABLE AT:

Bottom Mount Reach-In Refrigerator / Freezer

L-SERIES

Product plan View

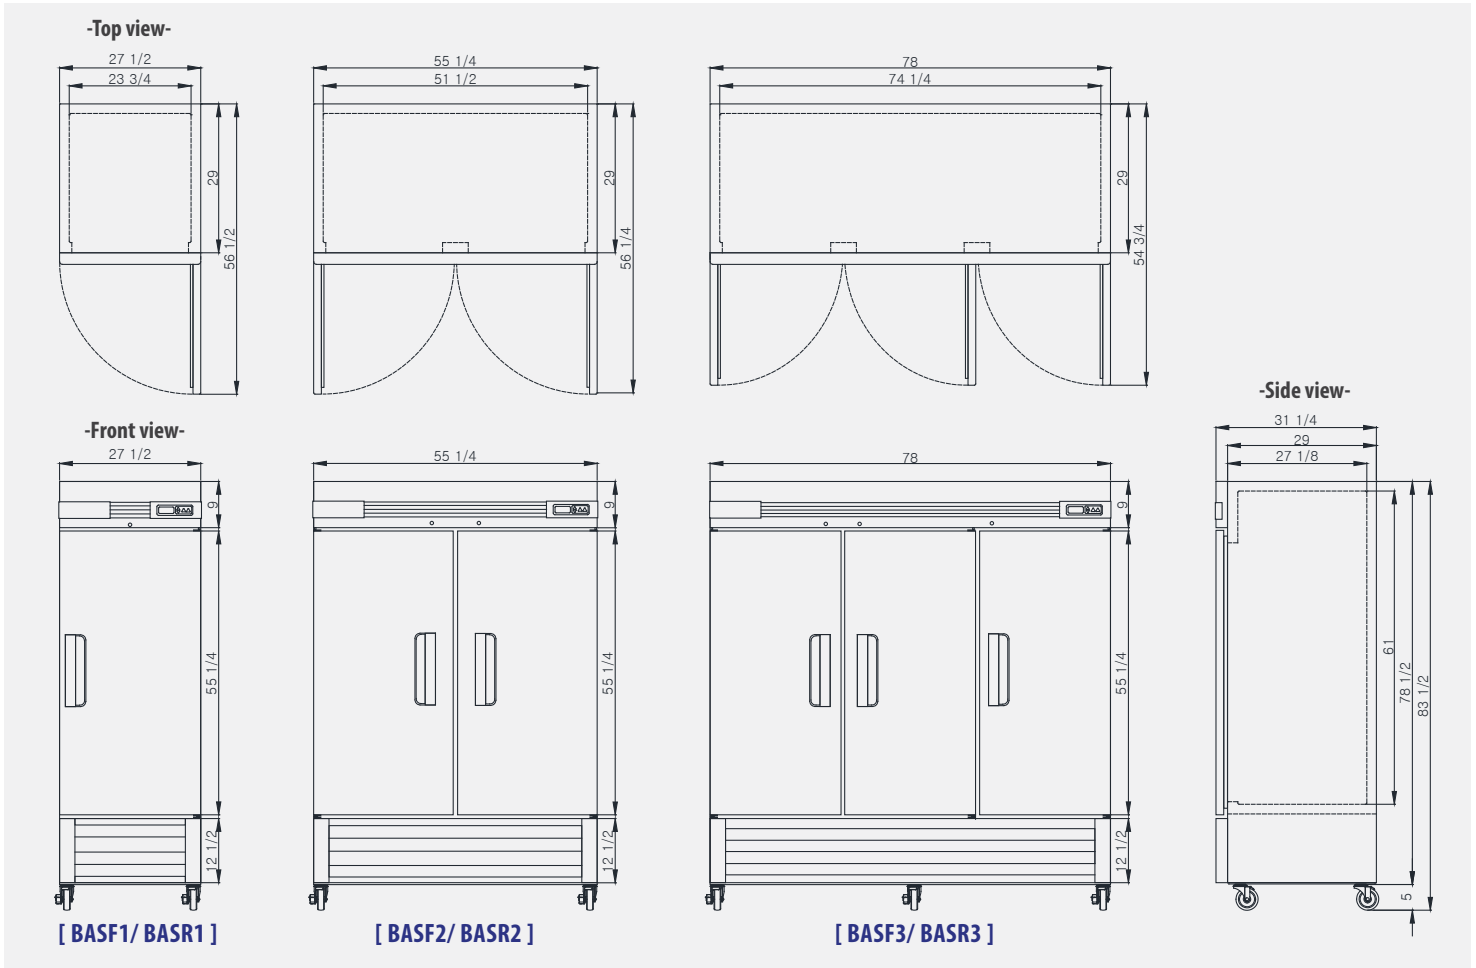

Product Specification

Bottom Mount Reach-In Freezer / L-Series

Model	Product Description			Refrigerant	Temperature Range	Easy Maintenance			Cord Length (ft/m)			
	Bottom Mount Freezer			R-404a	-20 ~ 0 °F	Sliding Condensing Unit			9.8ft (3m)			
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Voltage	Amps	NEMA Config.	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
L				D	H							
BASF1	1	23	4	27 1/2" (695mm)	31 1/4" (790mm)	83 1/2" (2120mm)	1/2	115V/60Hz	8.5	NEMA5-15	293 (133)	323 (147)
BASF2	2	49	8	55 1/4" (1400mm)	31 1/4" (790mm)	83 1/2" (2120mm)	3/4	115V/60Hz	9.5	NEMA5-15	463 (210)	529 (240)
BASF3	3	72	12	78" (1980mm)	31 1/4" (790mm)	83 1/2" (2120mm)	1.1	AC 115V /208~230V, 60Hz	9	NEMAL14-20	616 (279)	677 (307)

Bottom Mount Reach-In Refrigerator / L-Series

Model	Product Description			Refrigerant	Temperature Range	Easy Maintenance			Cord Length (ft/m)			
	Bottom Mount Refrigerator			R-134a	33 ~ 38 °F	Sliding Condensing Unit			9.8ft (3m)			
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Voltage	Amps	NEMA Config.	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
L				D	H							
BASR1	1	23	4	27 1/2" (695mm)	31 1/4" (790mm)	83 1/2" (2120mm)	3/8	115V/60Hz	7.5	NEMA5-15	286 (130)	314 (142)
BASR2	2	49	8	55 1/4" (1400mm)	31 1/4" (790mm)	83 1/2" (2120mm)	3/8	115V/60Hz	7.5	NEMA5-15	432 (196)	482 (219)
BASR3	3	72	12	78" (1980mm)	31 1/4" (790mm)	83 1/2" (2120mm)	1/2	115V/60Hz	10	NEMA5-15	602 (273)	670 (304)

* BLUE AIR has the right to change specifications without further notice.



<http://www.blueairinc.com>
info@blueairinc.com
 Toll Free. 1.866.677.8500

223 W. Rosecrans Ave., Gardena, CA., 90248
 T.310.808.0102, F.310.808.0242

9 W. Shelton Terrace #A, Hillside, NJ., 07205
 T.908.688.0970, F.908.688.8143