



COMMERCIAL REFRIGERATION

www.blueairinc.com | info@blueairinc.com

Toll Free 1.866.677.8500

PROJECT :	
MODEL # :	
ITEM # :	QTY :
AVAILABLE W/H :	
APPROVAL :	

Top Mount Reach-In Refrigerator / Freezer

D-SERIES



BSR23T / BSF23T

BSR49T / BSF49T

BSR72T / BSF72T

STANDARD FEATURES

TOP MOUNTED REFRIGERATION SYSTEM

STAINLESS STEEL INTERIOR AND EXTERIOR
QUALITY STAINLESS STEEL HELPS MINIMIZE DENTS, SCRATCHES AND RUST

STANDARD REAR WALL AIR GUARD ENSURES PROPER AIR FLOW AND COOLING

EVAPORATOR FAN STOPS AUTOMATICALLY WHEN DOOR IS OPENED

RECESSED DOOR HANDLE
RECESSED DOOR HANDLES HELP PREVENT SHIPPING DAMAGE AND HANDLE BREAKAGE

STANDARD DOOR LOCKS

DURABLE DOOR GASKET WITH EASY REPLACEMENT

INTERIOR LED LIGHT

CFC FREE HIGH DENSITY CELL POLYURETHANE INSULATION

DIGITAL TOTAL MONITORING SYSTEM

OFFERS AN AUTOMATIC DOOR ALARM SYSTEM, EASY TEMPERATURE ADJUSTMENT AND A SIMPLE TO CONTROL DEFROST CYCLE

4" DIAMETER SWIVEL CASTERS WITH FRONT BRAKES

ALL MODELS ACCOMMODATE FULL SIZE BUN SHEET PANS

4 SHELVES PER EACH DOOR SECTION WITH 1" ADJUSTABLE SHELVING HEIGHT

SELF-CLOSING AND STAY OPEN DOORS
DOORS REMAIN OPEN AT 120° AND AUTOMATICALLY CLOSE AT 96°

DOOR OPEN WARNING ALARM

FIELD REVERSIBLE DOOR (ADDITIONAL KIT REQUIRED)
BSF23T AND BSR23T MODELS ONLY




WARRANTY
3 Years Parts and Labor
5 Years on Compressor in USA

APPROVALS:

AVAILABLE AT:

Product plan View

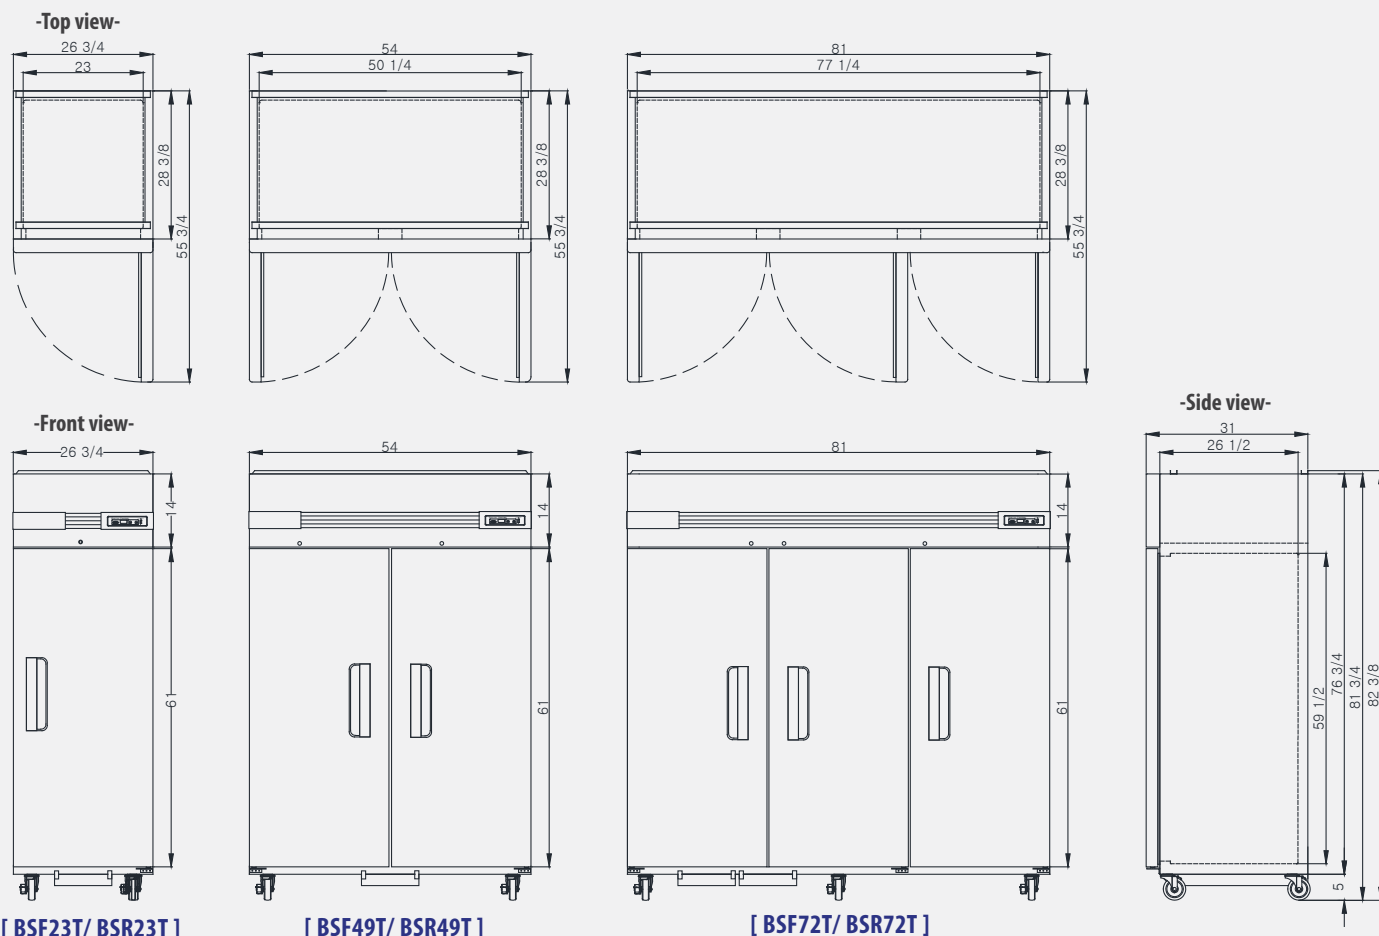

Product Specification

Top Mount Reach-In Freezer / D-Series

Model	Product Description				Refrigerant	Temperature Range	Easy Maintenance			Cord Length (ft/m)		
	Top Mount Freezer				R-404a	-10 ~ 0 °F	Sliding Condensing Unit			9.8ft (3m)		
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Voltage	Amps	NEMA Config.	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
			L	D	H							
BSF23T	1	23	4	26 3/4" (681mm)	31" (787mm)	81 3/4" (2075mm)	1/2	115V/60Hz	8	NEMA 5-15	248 (113)	287 (130)
BSF49T	2	49	8	54" (1370mm)	31" (787mm)	81 3/4" (2075mm)	3/4	115V/60Hz	10.5	NEMA 5-15	381 (173)	447 (203)
BSF72T	3	72	12	81" (2060mm)	31" (787mm)	81 3/4" (2075mm)	1	115V/60Hz 208~230V/60Hz	8.7 4.9	NEMA 14-20	556 (252)	639 (290)

Top Mount Reach-In Refrigerator / D-Series

Model	Product Description				Refrigerant	Temperature Range	Easy Maintenance			Cord Length (ft/m)		
	Top Mount Refrigerator				R-134a	33 ~ 38 °F	Sliding Condensing Unit			9.8ft (3m)		
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Voltage	Amps	NEMA Config.	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
			L	D	H							
BSR23T	1	23	4	26 3/4" (681mm)	31" (787mm)	82 3/8" (2100mm)	1/3	115V/60Hz	5	NEMA 5-15	233 (106)	274 (124)
BSR49T	2	49	8	54" (1370mm)	31" (787mm)	82 3/8" (2100mm)	1/3	115V/60Hz	6.3	NEMA 5-15	348 (158)	420 (191)
BSR72T	3	72	12	81" (2060mm)	31" (787mm)	82 3/8" (2100mm)	3/4	115V/60Hz	11.1	NEMA 5-15	503 (228)	609 (276)

* BLUE AIR has the right to change specifications without further notice.



<http://www.blueairinc.com>
info@blueairinc.com
 Toll Free. 1.866.677.8500

223 W. Rosecrans Ave., Gardena, CA., 90248
 T.310.808.0102, F.310.808.0242

9 W. Shelton Terrace #A, Hillside, NJ., 07205
 T.908.688.0970, F.908.688.8143